


Tantalum Chip Capacitors

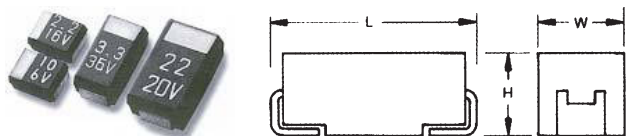


Dimensions	EIA code S	L[mm]	W[mm]	H[mm]
A	3216	3,2	1,6	1,6
B	3528	3,5	2,8	1,9
C	6032	6,0	3,2	2,6
D	7343	7,3	4,3	2,9

Technical parameters	CTS
Rated voltage (DC)	10/16/20/25/35V
Tolerance	±20%
Operating temp. range	-55...+125°C
Packaging	A, B: 2000 pcs C, D: 500 pcs
Ordering code	CTS 10uF 35V

Capacitance	Dimensions	Ord.No.
10V		
LxWxH		
S 10uF	3,2x1,6x1,6	A 8377
S 100uF	7,3x4,3x2,9	D 41302
16V		
S 2,2uF	3,2x1,6x1,6	A 41262
S 3,3uF	3,2x1,6x1,6	A 41292
S 4,7uF	3,2x1,6x1,6	A 41060
S 6,8uF	3,2x1,6x1,6	A 41061
S 10uF	3,5x2,8x1,9	B 41293
S 22uF	3,5x2,8x1,9	B 41338
S 47uF	7,3x4,3x2,9	D 41275
20V		
S 22uF	7,3x4,3x2,9	D 41274
S 33uF	7,3x4,3x2,9	D 41304
25V		
S 1uF	3,2x1,6x1,6	A 41278
S 2,2uF	3,5x2,8x1,9	B 41264
S 4,7uF	6,0x3,2x2,6	C 41265
S 10uF	6,0x3,2x2,6	C 41270
35V		
S 1uF	3,5x2,8x1,9	B 41263
O 2,2uF	6,0x3,2x2,6	C 41267
S 3,3uF	6,0x3,2x2,6	C 41268
S 4,7uF	6,0x3,2x2,6	C 41269
S 10uF	7,3x4,3x2,9	D 41272
50V		
S 1uF	6,0x3,2x2,6	C 62370

Tantalum Leaded Capacitors



Technical parameters	CT
Rated voltage (DC)	6,3/10/16/25/35V
Tolerance	±20%
Operating temp. range	-55...+125°C
Terminals	radial, Ø 0,5mm
Packaging	1000 pcs
Ordering code	CT 10uF 10V

Capacitance	Dimensions	RM	Ord.No.
6,3V			
DxH			
S 10uF	5x8,5	2,5	15784
S 22uF	5x9	2,5	15785
S 47uF	6x10	2,5	15786
10V			
S 10uF	5x8,5	2,5	15789
S 33uF	6,5x11	2,5	15792
16V			
S 2,2uF	4,5x7	2,5	15796
S 3,3uF	4,5x7	2,5	15797
S 4,7uF	5x8,5	2,5	15798
S 6,8uF	5x8,5	2,5	15799
S 10uF	5x9	2,5	15800
S 22uF	6x10	2,5	15802
S 47uF	7,5x10,5	2,5	15804
O 100uF	8,5x14	5	15807
25V			
S 2,2uF	4,5x7	2,5	15809
S 4,7uF	5x8,5	2,5	15811
S 10uF	6x10	2,5	15813
S 15uF	6x10	2,5	63988
S 22uF	7,5x10	2,5	15815
35V			
S 0,1uF	4,5x7	2,5	15818
S 0,22uF	4,5x7	2,5	15820
S 0,33uF	4,5x7	2,5	15821
S 0,47uF	4,5x7	2,5	15822
S 1uF	4,5x7	2,5	15824
S 1,5uF	5x8,5	2,5	15825
S 2,2uF	5,5x9	2,5	15826
S 4,7uF	5,5x9	2,5	15828
O 10uF	6x10	2,5	15830
O 22uF	8,5x13	2,5	69284
O 47uF	9,5x16,5	5	15834

For the current prices visit
www.soselectronic.com

 info@soselectronic.com