


BC 2002C

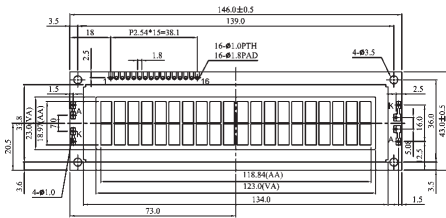

Part No.	Module Size (mm)	Viewing Area (mm)	Character Size (mm)	Fonts
BC 2002A BNHEH	116x37	85x19	5,55x3,2	
BC 2002A YPLEH	116x37	85x19	5,55x3,2	eng/european
BC 2002C BNHEH	146x43	123x23	9,22x4,84	eng/european
BC 2002C YPLEH	146x43	123x23	9,22x4,84	

Part No.	Ord. No.
S BC 2002A BNHEH	62067
S BC 2002A YPLEH	54057
S BC 2002C BNHEH	55733
S BC 2002C YPLEH	55316


4x20 Characters




Alphanumeric LCD Modules with 4x20 characters. BNHEH is blue colour with white backlight (negative), BC 2004A FNHEH is black / white (negative). Other models are with yellow - green LED backlight. Temperature range: -20°C to +70°C.




BC 2004A

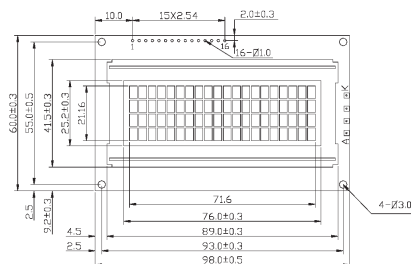

BC 2004B

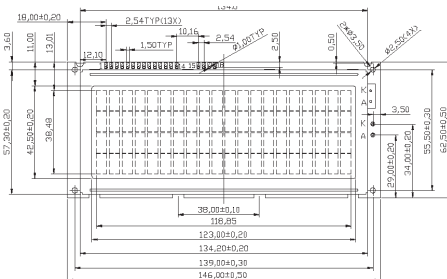

BC 2004D

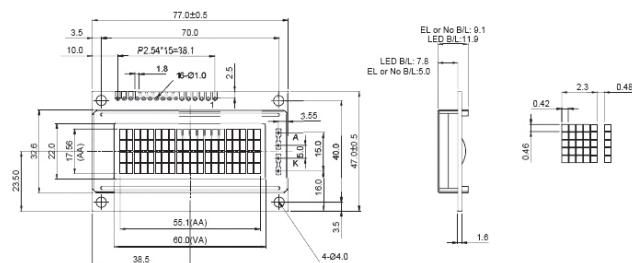


Part No.	Module Size (mm)	Viewing Area (mm)	Character Size (mm)	Fonts
BC 2004A BNHEH	98x60	77x25	4,75x2,95	
BC 2004A FNHEH	98x60	77x25	4,75x2,95	
BC 2004A YPLEH	98x60	77x25	4,75x2,95	eng/european
BC 2004B BNHEH	146x63	124x43	9,22x4,84	
BC 2004B YPLEH	146x63	124x43	9,22x4,84	eng/european
BC 2004D BNHEH	77x47	60x22	4,03x2,3	

Part No.	Ord. No.
S BC 2004A BNHEH	63675
S BC 2004A FNHEH	67496

Part No. Ord. No.

S BC 2004A YPLEH	52954
S BC 2004B BNHEH	60143
S BC 2004B YPLEH	53766
S BC 2004D BNHEH	68622

DEM 20485

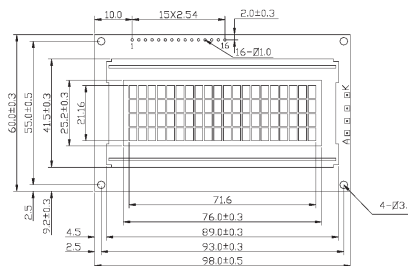

Part No.	Module Size (mm)	Viewing Area (mm)	Character Size (mm)	Fonts
DEM 20485 SYH-LY	98,0x60,0	76,3x25,0	4,75x2,95	


Part No. Ord. No.

S DEM 20485 SYH-LY	3682
--------------------	------

2x40 Characters

Alphanumeric LCD Module with 4x16 characters with yellow - green LED backlight. Temperature range: 0°C to +50°C.

DEM 40271

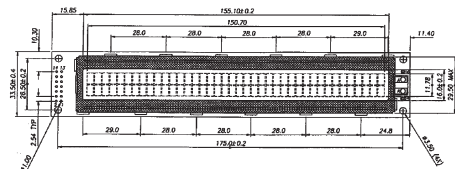

Part No.	Module Size (mm)	Viewing Area (mm)	Character Height (mm)	Fonts
DEM 40271 SY-LY	182,0x33,5	155,1x16,0	5,69	

Part No. Ord. No.

S DEM 40271 SY-LY	41100
-------------------	-------

Numbering system for Bolymin LCD modules

B	C	2004	A	G	P	L	E	B	xxx
0	1	2	3	4	5	6	7	8	9
0	Brand	Bolymin							
1	Module Type	C= character type G= graphic type P= TAB/TCP type R= color STN				O= COG type F= COF type L= OLED			
2	Format	2002=20 characters, 4 lines 12232= 122 x 32 dots							
3	Version No.	A type							
4	LCD Color	G=STN/gray Y=STN/yellow-green C=color STN				B=STN/blue F=FSSTN T=TN			
5	LCD Type	R=positive/reflective P=positive/transflective				M=positive/transmissive N=negative/transmissive			
6	Backlight type/color	L=LED array/ yellow-green H=LED edge/white R=LED array/red G=LED edge/yellow-green N=No Backlight F=RGB				D=LED edge/blue E=EL/white B=EL/blue C=CCFL/white Y=LED Bottom/yellow O=LED array/orange K=LED edge/Green Pure A=LED edge/amber			
7	CGRAM Font	J=English/Japanese Font E=English/European Font G=Chinese (simple) F=Chinese (traditional)				C=English/Cyrillic Font H=English/Hebrew Font A=Arabic/English			
8	View Angle/ Operating Temperature	B=Bottom/Normal Temperature W=Top/Wide Temperature H=Bottom/Wide Temperature U=Bottom/Ultra wide Temperature				T=Top/Normal Temperature W=Top/Wide Temperature C=9H/Normal Temperature E=Top/ultra wide temperature			
9	Special Code	3=3 volt logic power supply n=negative voltage for LCD c=cable/connecter xxx=to be assigned on datasheet				t=temperature compensation for LCD p=touch panel			