Pin Headers

WW-series of pin headers are made from brass with gold-plating. The pin´s cross-section is square-shaped 0,635x0,635mm, they are suitable for Wire-Wrap connections. Pin strips may be easily broken into smaller sections. Max. rated current is 3A.

Pitch 2,54mm

WWS xx G Series

Single row Wire-Wrap PCB pin strips, straight Dip type. Dimensions: A=11,6mm, B=5,9mm, C=3,2mm. 8-, 10-, 20-, 36-contacts versions available.



	Part No.	Ord.No.	Description
S	WWS 08 G	25326	1x8 RM2,54 Au
S	WWS 10 G	25327	1x10 RM2,54 Au
S	WWS 20 G	25328	1x20 RM2,54 Au
S	WWS 36 G	19012	1x36 RM2,54 Au
S	WWS 40G	55112	1x40 RM2,54 Au

WWS xx A Series

Single row Wire-Wrap PCB pin headers, right angled. Dimensions: A=13,2mm, B=6mm, C=3mm. 10, 20, 36-contacts versions available.



	Part No.	Ord.No.	Description
S	WWS 10 A	25330	1x10 RM2,54 Au
S	WWS 20 A	25331	1x20 RM2,54 Au
S	WWS 36 A	20074	1x36 RM2,54 Au

WWD xx G Series

Double-row Wire-Wrap PCB pin headers, straight type. Dimensions: A=11,6mm, B=6mm, C=3mm. 2x8, 2x10, 2x20, 2x36 contacts versions available.



	Part No.	Ord.No.	Description
S	WWD 16 G	25332	2x8 RM2,54 Au
S	WWD 20 G	25333	2x10 RM2,54 Au
S	WWD 40 G	25334	2x20 RM2,54 Au
S	WWD 72 G	18491	2x36 RM2,54 Au

WWD xx A Series

Double-row Wire-Wrap PCB pin headers, right angled. Dimensions: A=14,5mm, B=6mm, C=3,2mm. 2x8, 2x10, 2x20, 2x36 contacts versions available.



	Part No.	Ord.No.	Description
S	WWD 16 A	25335	2x8 RM2,54 Au
S	WWD 20 A	25336	2x10 RM2,54 Au
S	WWD 40 A	25337	2x20 RM2,54 Au
S	WWD 72 A	18492	2x36 RM2,54 Au

WWT xx G Z Series

Triple-row Wire-Wrap PCB pin headers, straight. Only 96 contact versions is available.



	Part No.	Ord.No.	Description
S	WWT 96 G Z	8185	3x32 RM2,54 Sn

SPL xx Series

Precise single row PCB pin headers, straight. Round cross-section, mating BLxxxG-PSO4,1 Series. 20, 32, 64
- contacts versions available.





	Part No.	Ord.No.	Description
S	SPL 20	20094	1x20 RM2,54 Au
S	SPL 32	24766	1x32 RM2,54 Au
S	SPL 64	25683	1x64 RM2,54 Au

SL5

Single row Wire-Wrap PCB pin headers, straight contacts. Length A=36,0mm, tin-plated contacts. 10 contacts version available.



	Part No.	Ord.No.	Description
S	SL 5/360 10Z	4443	1x10 RM2,54

Pitch 2mm

Wire-Wrap PCB pin headers, straight. Contact´s cross-section is 0,5x0,5mm.

WWS 40 G 2



WWD 80 G 2



	Part No.	Ord.No.	Description
S	WWS 40 G 2	6715	1x40 RM2 Au
S	WWD 80 G 2	6716	2x40 RM2 Au

Jumpers

Jumpers (connectors) with 2,54mm pitch, except the MINIJUMP, with 2mm pitch. Max. current is 3A, gold-plated pins.

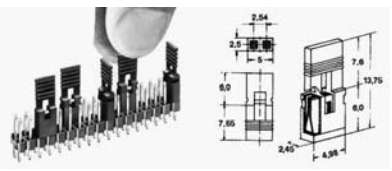

Part No.	Description
JUMP-OF BK	Jumper RM2,54 open, black, Au, 4,36mm high
JUMP-OF/TAG SW	Jumper RM2,54 tag, black, Au
JUMP-OF RD	Jumper RM2,54 red, Au
MINIJUMP-BK	Jumper RM2 black, Au

	Part No.	Ord.No.
S	JUMP-OF BK	11264
S	JUMP-OF/TAG SW	51095
S	JUMP-OF RD	11263
S	MINIJUMP-BK	4187