


PCB Terminal Blocks with Cage Clamp (continued)



257-55x
257-85x

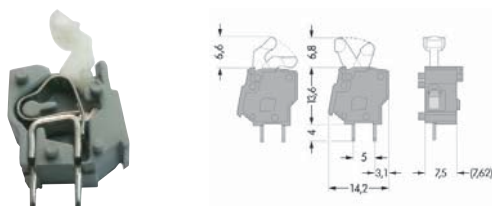

Technical Parameters		257-55x 257-85x
Pitch		7.5mm
Mounting Position		vertical
Wire Section		0,08-2,5mm ²
Maximum Voltage		400V
Maximum Current		16A
Stripping Length		6mm
Modular		yes
Maximum Temperature		105°C
Suitable End Plates		257 series
Note		with bend lever

Part No.	Ord. No.	Colour
S 257-551	42031	grey
S 257-854	42043	blue
S 257-857	42045	green

End Plates 257-xxx




Part No.	Ord. No.	Colour
S 257-100	42025	grey
S 257-400	42026	blue
S 257-600	42034	orange
S 257-700	42035	green

Multi Connection System WAGO



231-30x/026-000





Technical Parameters		231-30x/026-000
Pitch		5,08mm
Wire Section		0,08-2,5mm ²
Maximum Voltage		250V

Maximum Current	16A
Stripping Length	8mm
Modular	yes
Maximum Temperature	105°C

Part No.	Ord. No.	Colour	Package
○ 231-302/026-000	41819	2-poles	200 pcs
○ 231-303/026-000	41820	3-poles	100 pcs
○ 231-304/026-000	41821	4-poles	100 pcs
○ 231-305/026-000	41822	5-poles	100 pcs
○ 231-308/026-000	41825	8-poles	50 pcs
○ 231-312/026-000	60249	12-poles	25 pcs
○ 231-316/026-000	41830	16-poles	25 pcs



231-63x



Technical Parameters		231-63x
Pitch		5,08mm
Wire Section		0,08-2,5mm ²
Maximum Voltage		250V
Maximum Current		12A
Stripping Length		8mm
Modular		yes
Maximum Temperature		105°C

Part No.	Ord. No.	Description	Package
○ 231-632	70131	2-poles	200 pcs
○ 231-633	41867	3-poles	100 pcs
○ 231-634	41868	4-poles	100 pcs
○ 231-635	70132	5-poles	50 pcs
○ 231-638	44529	8-poles	50 pcs
○ 231-642	70133	12-poles	25 pcs
○ 231-646	44531	16-poles	25 pcs

231-33x/001-000, 231-34x/001-000



Technical Parameters		231-33x/001-000, 231-34x/001-000	
Pitch		5,08mm	
Mounting Position		straight	
Maximum Voltage		250V	
Maximum Current		12A	
Maximum Temperature		105°C	

Part No.	Ord. No.	Descr.	Package
○ 231-332/001-000	41832	2-poles	200 pcs
○ 231-333/001-000	70129	3-poles	200 pcs
○ 231-334/001-000	41835	4-poles	200 pcs
○ 231-335/001-000	41836	5-poles	200 pcs
○ 231-338/001-000	41840	8-poles	100 pcs
○ 231-342/001-000	70130	12-poles	100 pcs
○ 231-346/001-000	41843	16-poles	50 pcs