


## Push-Wire Connectors for Junction Boxes (continued)




273-403  
273-453



273-102  
273-254

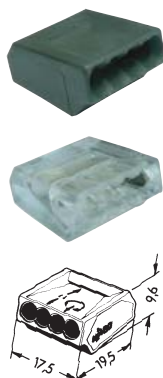


273-101  
273-155

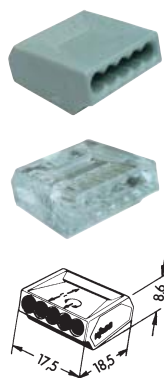


Technical Parameters	273-403/ 273-453	273-102/ 273-254	273-101/ 273-155
Number of Wires	3	4	5
Wire Section	1,5-4mm <sup>2</sup>	1-2,5mm <sup>2</sup>	0,75-1,5mm <sup>2</sup>
Stripping Length	15mm	13mm	13mm
Maximum Voltage	400V	400V	400V
Maximum Current	32A	24A	18A
Maximum Temperature	105°C	105°C	105°C
Colour	grey/ transparent	dark grey/ transparent	grey/ transparent

Part No.	Ord. No.	Description
S 273-101	42116	grey 1,5mm <sup>2</sup> 5P
S 273-155	42123	plexi 1,5mm <sup>2</sup> 5P
S 273-102	42117	grey 2,5mm <sup>2</sup> 4P
S 273-254	42127	plexi 2,5mm <sup>2</sup> 4P
S 273-403	42130	grey 4,0mm <sup>2</sup> 3P
S 273-453	42131	plexi 4,0mm <sup>2</sup> 3P

273-105  
273-255

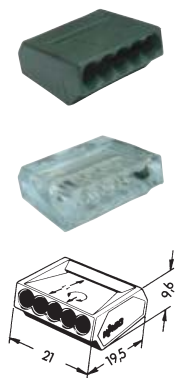

273-108  
273-158

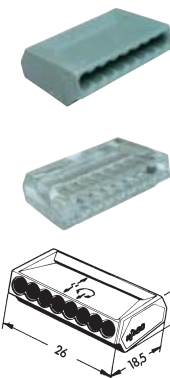


273-103  
273-258



Technical Parameters	273-105/ 273-255	273-108/ 273-158	273-103/ 273-258
Number of Wires	5	8	8
Wire Section	1-2,5mm <sup>2</sup>	0,75-1,5mm <sup>2</sup>	1-2,5mm <sup>2</sup>
Stripping Length	13mm	13mm	13mm
Maximum Voltage	400V	400V	400V
Maximum Current	24A	18A	24A
Maximum Temperature	105°C	105°C	105°C
Colour	dark grey/ transparent	grey/ transparent	dark grey/ transparent

Part No.	Ord. No.	Description
S 273-108	42121	grey 1,5mm <sup>2</sup> 8P
S 273-158	42124	plexi 1,5mm <sup>2</sup> 8P
S 273-105	42120	grey 2,5mm <sup>2</sup> 5P
S 273-255	42128	plexi 2,5mm <sup>2</sup> 5P
S 273-103	42118	grey 2,5mm <sup>2</sup> 8P
S 273-258	42129	plexi 2,5mm <sup>2</sup> 8P

773-173



Technical Parameters	773-173
Number of Wires	3
Wire Section	2,5 - 6mm <sup>2</sup>
Stripping Length	12mm
Maximum Voltage	400V
Maximum Current	41A
Maximum Temperature	105°C
Colour	red/transparent

Part No.	Ord. No.	Description
S 273-108	42121	grey 1,5mm <sup>2</sup> 8P

273-150

Adaptor for 3 terminals of 273 series to DIN rail or screws mounting. Colour orange.



Part No.	Ord. No.
S 273-150	53011