


Miniature Speakers

K 20.40 8OHM

Rectangular miniature speaker. Thanks to its compact dimensions, suitable for signal output in machines and other equipment where space is at a premium.

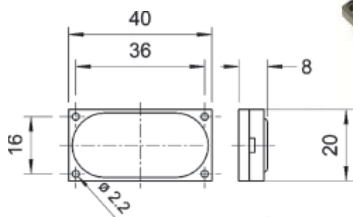

Technical Parameters	K 20.40 8OHM
Dimensions	40 x 20 mm
Depth	8 mm
Rated Noise Power	1 W
Short Term Maximum Power	2 W
Impedance	8 Ω
Resonant Frequency	600 Hz
Rated Frequency Range	300-20000 Hz
Sensitivity	76 dB

Part No.	Ord.No.
s K 20.40 8 OHM	61401



Part No.	Diameter x depth	Max. power	Frequency Range	Impedance
LS 45 = BL-45	45 x 18mm	0,2 W	450-4500 Hz	8 Ω
LS 50 F = BL-50	50 x 18mm	0,2 W	450-4500 Hz	8 Ω
LS 57 = BL-57	57 x 19mm	0,2 W	420-5000 Hz	8 Ω
LS 66 = BL-66	66 x 21mm	0,3 W	360-4000 Hz	8 Ω
LS 77 = BL-77	77 x 23mm	0,5 W	260-6000 Hz	8 Ω
LS 92 = BL-92	92 x 25mm	1,0 W	220-8000 Hz	8 Ω

Part No.	Ord.No.
s LS 45 = BL-45	55187
s LS 50 F = BL-50	16714
s LS 57 = BL-57	16715
s LS 77 = BL-77	16718
s LS 92 = BL-92	16719

Hammond Transformers and Inductors

Power



Chokes



Line



Audio



Tube Audio



Guitar Amp



Class 2



Pulse



Instrument

