


**USB**, Ausführung B-Mini, 5-Polig, SMD

**USB**, version B-Mini, 5-poles, SMD



**Isolierkörper**

Nylon PA9T

**Kontakte**

Phosphorbronze

**Durchschlagsspannung**

500V AC

**Isolationswiderstand**

1000M $\Omega$  min.

**Strombelastbarkeit**

1.5A

**Insulator**

Nylon PA9T

**Contacts**

Phosphorbronze

**Withstanding voltage**



500V AC

**Insulation resistance**

1000M $\Omega$  min.

**Rated current**

1.5A

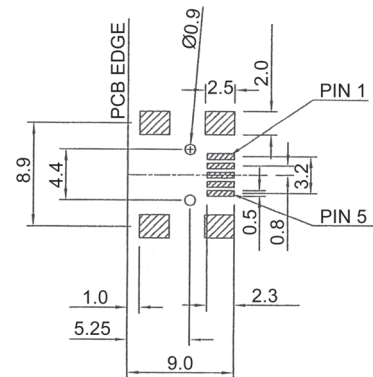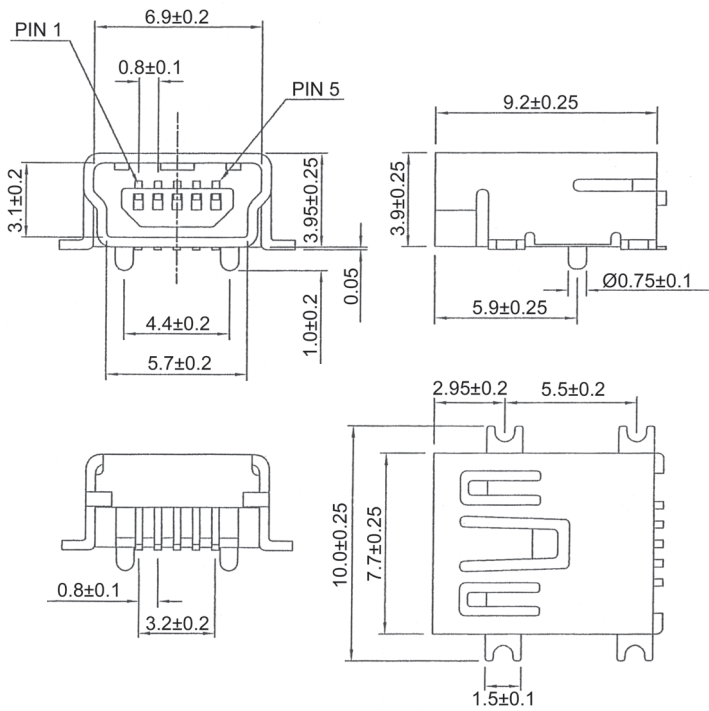

Bestellcode : **A - USBB - M5/SMD**  
 Ordercode :

D-Sub / Hoods  
Centronics

Multiflex

Modular

USB

Switches

Powercords  
Powersockets

MiniDIN

DIN4161x  
Hardmetric

Sockets + Strips  
Jumper